Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 203140

PEM* F SERIES
FEATURES AND SPECIFICATIONS

OPTIONS

PART NUMBER	RATED CURRENT	IEC CONN	FUSE	ON/OFF SWITCH	VOLT SELECT
F6-12S10E	3A	YES	YES	YES	NO
F6-12VS10E	3A	YES	YES	NO	YES
F6-12S10EVS	3A	YES	YES	YES	YES

SPECIFICATIONS

1.0 HIGHPOT RATING:
LINE-TO-GROUND: 2000 VAC
LINE-TO-LINE: 1750 VDC

2.0 RATED VOLTAGES AND FREQUENCY:
115/250 VAC, 47-63 Hz

3.0 MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND.
115 VAC, 60 Hz: 0.25 mA MAX
250 VAC, 60 Hz: 0.50 mA MAX

4.0 PERFORMANCE

MHz.		0.15	0.20	0.50	10.00	20.00
CM	L/G	20 dB	25 dB	50 dB	65 dB	65 dB
DM	L/L	45 dB	50 dB	65 dB	70 dB	60 dB

APPLICATIONS
* LINEAR POWER SUPPLIES
* TEST EQUIPMENT
* SMPS WITH ON-BOARD FILTER
* TERMINALS

FEATURES
* MINIMUM SPACE REQUIREMENT
* COST SAVING INTREGRATION
* SAFETY INTERLOCK ON FUSE

* = PEM= POWER ENTRY MODULE

PEM* F SERIES

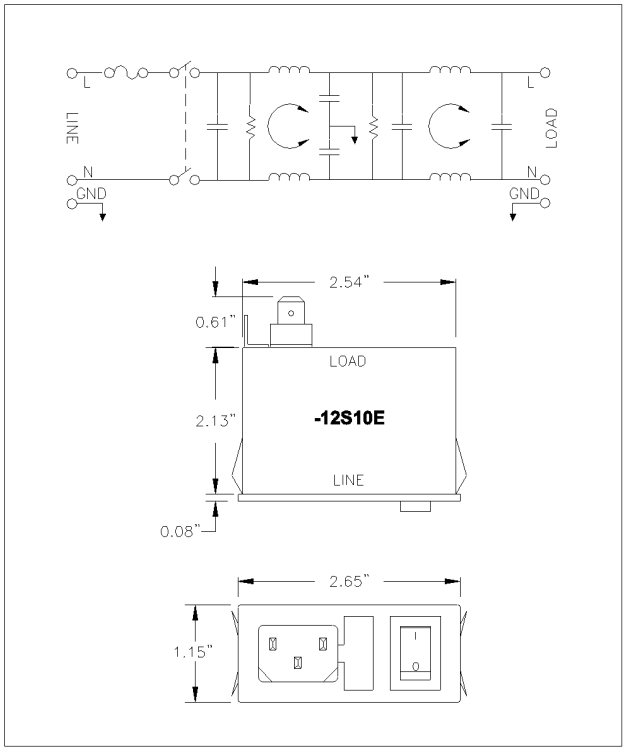

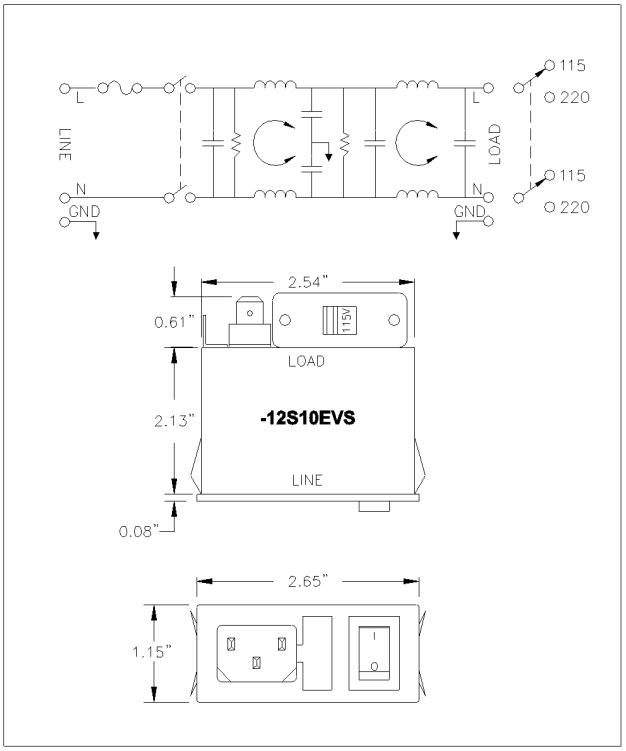

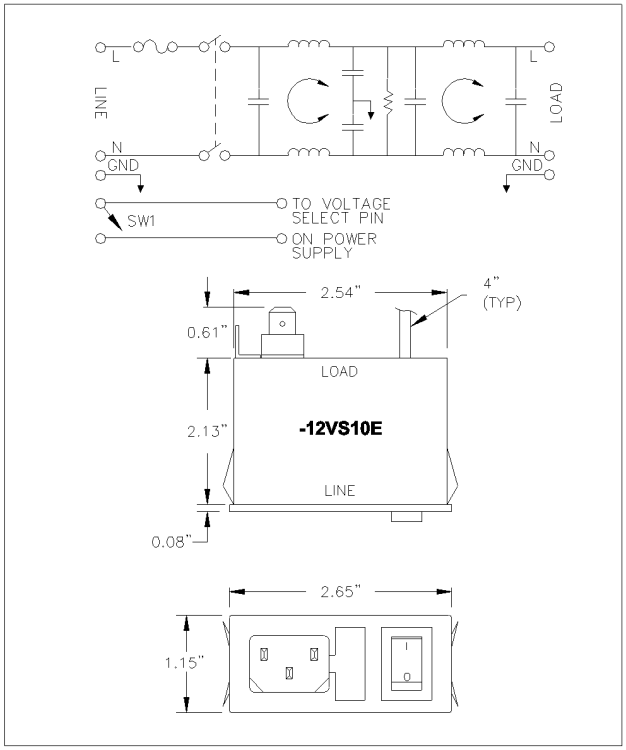

***=PEM=POWER ENTRY MODULE**